



3/2 Way Single Solenoid Valve

Features

- ▶▶ Compact Design with Maximum Flow
- ▶▶ Design Suitable For Gang Manifold upto 12 Valves or Above In Single Manifold
- ▶▶ Push & Rotate Lockable Combined Manual Override Function.
- ▶▶ Aluminum Extruded Body with Anodization.


Technical Specification

Model	2ADSS - 302	2ADSS - 304
Size	1/4"	1/2"
Design	Spool type, Internal Pilot Operated (External Pilot On Request)	
Pressure	1 to 10 Kg/cm ²	
Temperature	5 to 55 °C	
Leakage	Bubble Tight	
Duty Cycle	Continuous Rated	
Protection	IP 65 Class F	
Connector	DIN 43650 B	
Response Time	15 msec ON / 25 msec OFF	
Coil Voltage	12V, 24V, 48V, 110V, 230V, (AC / DC) 50 / 60 Hz (Non Std. Voltage Available On Request)	
Media	Compressed Air (Filtered & Lubricated)	
Weight (Kg)	0.290	0.585

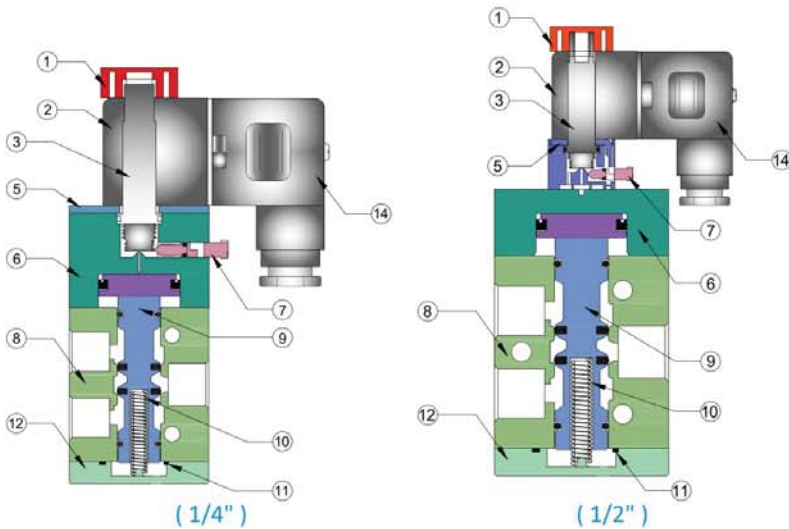

No.	Part Name	Material
1	Nut	Nylon
2	Coil Assembly	Standard Steel
3	Armature Assembly	Steel Plated
4	Screw	Steel Plated
5	SS Plate	Steel Plated
6	Solenoid Cover	Aluminum Powder Coated
7	Manual Adjusting	Aluminum / Nylon
8	Body	Aluminum / Anodized
9	Spool Assembly	Aluminum
10	Spring	Steel Plated
11	End Cover Seal	NBR
12	End Cover	Aluminum Powder Coated
13	Screw with Washer	Steel Plated
14	Connector	Nylon

Size : 1/4" BSP (Dimensions are in mm)

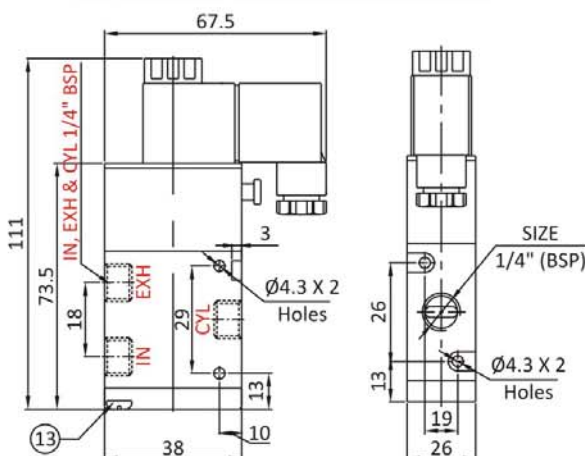

Size : 1/2" BSP (Dimensions are in mm)

